Sales – Rentals – Parts info@sapphirelaundry.co.uk www.sapphirelaundry.co.uk



## SP10 / SD10



## Features - Washer Extractor


- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimising drying times and utility costs
- Totally freestanding: can be installed on any floor and any level
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Door opens 180° for easy loading and unloading
- Standard, drain valve
- Top, front and side panels available in anthracite grey
- Electrical heating or boiler-fed
- Special mop wash programs: mops & microfibres
- LED indication of the status of the program
- Time remaining countdown
- Compact design



## Features - Dryer

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading
- Top, front and side panels standard available in anthracite grey
- Electrical or gas heating
- 4 drying programs
- LED indication of the status of the program
- Time remaining countdown





Number of Mops/batch *	SP10 MOP
Mops 100g**	90
Mops 180g**	50
Mops 200g**	45
Mops 230g**	39
Microfibre cloths 16g	563
Microfibre cloths 22g	409
Microfibre cloths 25a	350

<sup>\*</sup> Numbers are indicative. Contact your Primus partner for detailed information on your requirements,

<sup>\*\*</sup> Dimension mops 50cm x 12cm


## Dimensions & Specifications


Type		SP10
Туре		
CAPACITY	kg	10
DRUM VOLUME	I	96,8
MOTOR	1.147	0.47
Frequency Controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
		1x220-240V 50Hz
ELECTRICAL CONNECTION		1x220-240V 60Hz
ELECTRICAL CONNECTION		3x220-240V 50Hz
		3x380-415V+N 50Hz
ELECTRICAL HEATING	kW	4,8
DRAIN		
Drain Valve		Standard
DIMENSIONS		
HxWxD	mm	1027x683x704
Net Weight	kg	113
TRANSPORT DATA		
Volume (packed)	m3	0,71
Packed HxWxD	mm	1150x760x860
Gross Weight	kg	122

Туре		SP10
CAPACITY	kg	10
DRUM VOLUME	ı	198
ELECTRICAL CONNECTION		1x220-240V 50Hz
		3x220-240V 50Hz
		3x380-415V+N 50Hz
ELECTRICAL HEATING kW	L\\/	5,2 (230V)
	NVV	5,3 (400V)
GAS HEATING	kW	7,3
MOTOR POWER		0,25
DIMENSIONS		
HxWxD	mm	1027x683x711
Net Weight	kg	68
TRANSPORT DATA		
Volume (packed)	m3	0,71
Packed HxWxD	mm	1150x760x860
Gross Weight	kg	73

<sup>\*</sup> To combine with the collector it's required a base frame (200mm height) is ordered



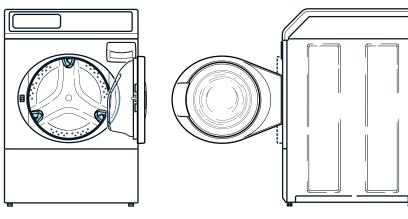



SD10 Front View SD10 Side View SD10 Back

