



WLS 25 / WSMS 13 WLS 30 / WLSD 30 WLS 35



Features

- Standard stainless steel drum with large diameter
- Easy control - easy to use microprocessor
- Combination of Radial and Axial airflow:
 - maximal heat transfer
 - low energy consumption
 - short drying time
- Large door opening for easy loading and unloading

Options


- Coin operated version
- Reversing drum
- Professional control - Full control programmer
- Residual moisture control:
 - safe drying of delicate linen
 - humidity detection in %
 - ideal for dry cleaners, fire depts
 - available on Easy and Professional control



Dimensions & Specifications

Type		WLS 25	WSMS 13	WLS 30	WLS 30	WLS 35
CAPACITY						
Capacity	kg/lb	11/24	13/27	13/27	2x13/2x27	16/35
Drum Volume	l	250	285	285	2x285	345
Drum Diameter	mm	Ø760	Ø760	Ø760	2xØ760	Ø760
Number of Drums		1	1	1	2	1
Number of Loading Doors		1	1	1	2	1
AIRFLOW	m ³ /h	520	550	550	1050	600
DRYING AVERAGE	g/min	190	225	225	2x225	300
MOTOR						
Fan	kW	0,55	0,75	0,75	2x0,75	0,55
Drive	kW	0,25	0,25	0,25	2x0,25	0,25
GAS HEATING						
Gas Connection	NPT	3/4"	3/4"	3/4"	3/4"	3/4"
Electrical Connection		3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz				
Energy	kW	16,5	19,5	19,5	2x19,5	25
	kBTU/h	56,3	66,5	66,5	2x66,5	85,3
STEAM HEATING						
Steam Connection	NPT	3/4"		3/4"	2x3/4"	3/4"
Electrical Connection		3x220-240V 50Hz 1x220-240V 50Hz 3x380-415V 50Hz		3x220-240V 50Hz 1x220-240V 50Hz 3x380-415V 50Hz		
Steam Output*	kW	16,5-22		19,5-27	2x19,5-27	22-32
Steam Pressure	bar	3-6/7-10		3-6/7-10	3-6/7-10	3-6/7-10
ELECTRICAL HEATING						
Electrical Connection		3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz				
Energy	kW	13,5	18,0	18,0	2x18,0	24,0
PROGRAMMER						
Easy Control – Antivandal (ECT)		Standard	Standard (No coin)	Standard	Standard	Standard
Professional Control (FCT)		Available	Available	Available	Available	Available
EXHAUST	mm	200				
DIMENSIONS						
HxWxD	mm	1680x795x1070	1075x795x1240	1680x795x1160	2030x795x1240	1680x795x1280
TRANSPORT DATA						
Gross Weight	kg	240	200	265	385	270
Net Weight	kg	230	185	250	370	250
Packing HxWxD	mm	1785x855x1100	1160x880x1325	1785x855x1190	2120x880x1325	1785x855x1310

* Steam output is flexible depending on steam pressure. The data concerning dimensions of machines include all extended parts

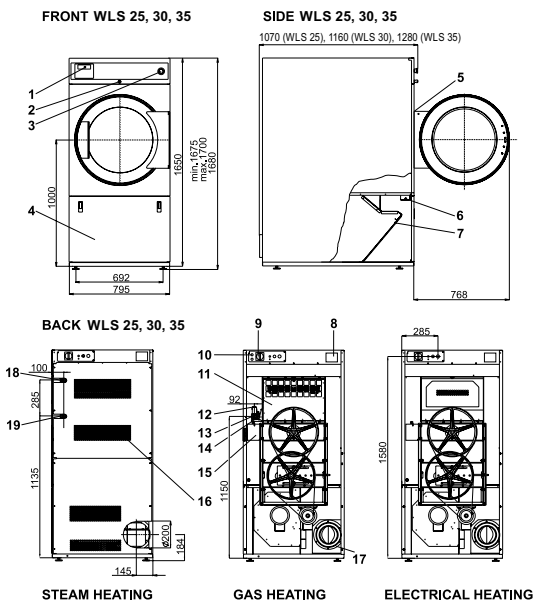

1. Programmer
2. Lock of the control panel
3. Emergency stop button (not applicable for version with coin meter)
4. Lint screen cover
5. Door lock microswitch
6. Lint cover microswitch
7. Lint screen
8. Name plate
9. Main switch
10. Main power supply
11. Heating chamber
12. Gas valve (G models only)
13. Pressure regulator (G models only)
14. Gas supply (G models only)
15. Air flow switch
16. Suction
17. Exhaust piping
18. Steam supply
19. Condense drain

